

BrightEye 30

Audio ADC and DAC, Bi-directional

BrightEye 30 is a flexible audio converter that can be a two channel, bi-directional ADC and DAC, or it can be configured as a four channel converter. Perfect in desktop, post and broadcast applications, 24 bit processing ensures beautiful audio.



As a bi-directional converter, two channels of analog audio are converted to AES digital audio and at the same time an AES stream is converted to two channels of analog.

Alternately, the unit can be configured as a four channel AES to analog converter or a four channel analog to AES converter.

BrightEye 30 also serves as a sample rate converter. For example, a digital 44.1 KHz signal from a CD player can be fed to the input and a digital AES3id, 48 KHz signal synchronous to the reference input will be output.

Audio mixing, level adjustments, and channel shuffling are accessed through BrightEye PC. Optional audio delay capability is available upon request. A variety of audio connectors and adapters are available for integrating BrightEye 30 to any type of system.

A reference input is provided which allows digital outputs to be synchronized to either a PAL or NTSC video signal or AES reference.

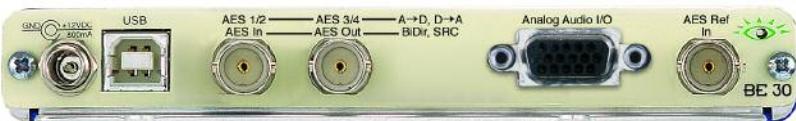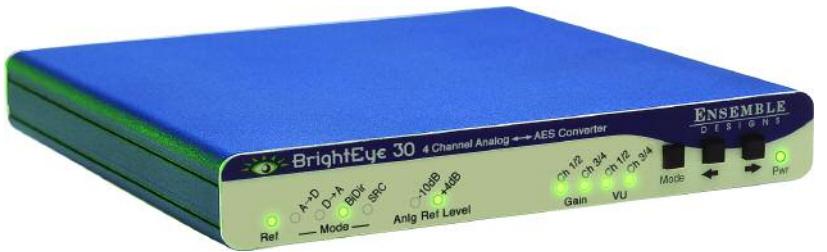

- ▶ 2 or 4 Channel Audio Converter
- ▶ Analog and Digital Inputs
- ▶ Analog and Digital Outputs
- ▶ Bi-directional ADC/DAC
- ▶ Sample Rate Converter

AES/EBU Digital Inputs

Number	Two (total of four channels) (selectable as inputs or outputs)
Type	AES3id
Connectorization	Coaxial, 75 Ω
Bit Depth	20 and 24 Bit
Sample Rate	30KHz to 96KHz (Sample Rate Converted internally to 48KHz)
Reference Level	-18 or -20 dBFS (selectable)
AC-3, Dolby-E	Supported when inputs are synchronous

Analog Audio Outputs

Number	Four (selectable as inputs or outputs)
Type	Balanced, transformerless
Impedance	30 Ω
Maximum Output Level	24 dBu
Resolution	24 bits, 128x Oversampled
Reference Level	-10 dBu or +4 dBu
Frequency Response	±0.1dB, 20Hz to 20KHz
Crosstalk	<106 dB
Dynamic Range	>106 dB

AES/EBU Digital Outputs

Number	Two (total of four channels) (selectable as inputs or outputs)
Type	AES3id
Connectorization	Coaxial, 75 Ω
Bit Depth	24 Bit
Sample Rate	48 KHz
Reference Level	Synchronous to Video output -18 or -20 dBFS (selectable)

General Specifications

Size	5.625" W x 0.8" H x 5.5" D (143 mm x 20 mm x 140 mm) including connectors
Power	12 volts, 7 watts (100-230 VAC modular power supply)
Temperature Range	0 to 40 °C ambient
Relative Humidity	0 to 95 ° non-condensing